

# 3/2-way Lever Valve, DN 9

# Product Information



**A. u. K. Müller**

Solenoid valves  
Control valves  
Special valves and systems

A. u. K. Müller GmbH & Co. KG  
Dresdener Str. 162  
D-40595 Düsseldorf/Germany

Tel.: +49(0)211-7391-0  
Fax: +49(0)211-7391-281

e-mail: [info@akmueller.de](mailto:info@akmueller.de)  
Internet: [www.akmueller.de](http://www.akmueller.de)

## Series 47.009.303



Function: Mixing (ID: 090902)



Function: Distribution (ID: 090904)

## Characteristics

- Direct acting
- Medium separated
- Minimal dead areas in valve body
- Long term performance capability
- No minimal pressure required
- Suitable for hot water appliances (98 °C)
- Easy to assemble and service
- Low power consumption
- Any fitting position
- High operating safety through the use of high quality materials and 100% final testing of the products

## Description

Direct acting 3/2-way solenoid lever valve with orifice size DN 9 for control of neutral gases and liquids. The plunger of the magnetic system is protected from the medium by spatial separation. In particular, the low dead space is a further advantage of the lever valves.

Valves of this design are single chamber valves with threaded connections.

The coil system can be customised for common voltage and frequency ranges on request.

The electrical operational safety is guaranteed by the electrical insulation coordination, which corresponds to the VDE 110 regulations. The manufacturing process includes a 100% electrical safety test in accordance with the VDE 0631 Part 1000 regulations.

Due to the use of high quality materials, the valve is applicable for high ambient temperatures and medium temperatures up to 98 °C.


The good thermal separation between the fluid path and the solenoid coil also allows the use of temperature sensitive media, such as in the medical technology or analytics.

The valve is ideally suited for dosing applications as well as distribution of fluids.

## Applications

- Tank or boiler draining
- Medical engineering
- Laboratory / analysis equipment
- Industrial applications


Typical Performance Curve  
(under laboratory conditions)

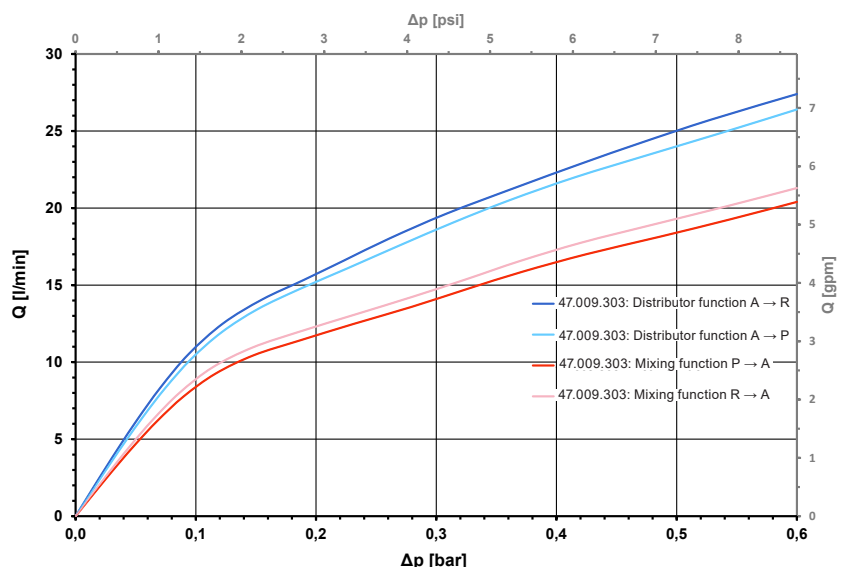



### Series 47.009.303

Function: Mixing (ID: 090902)

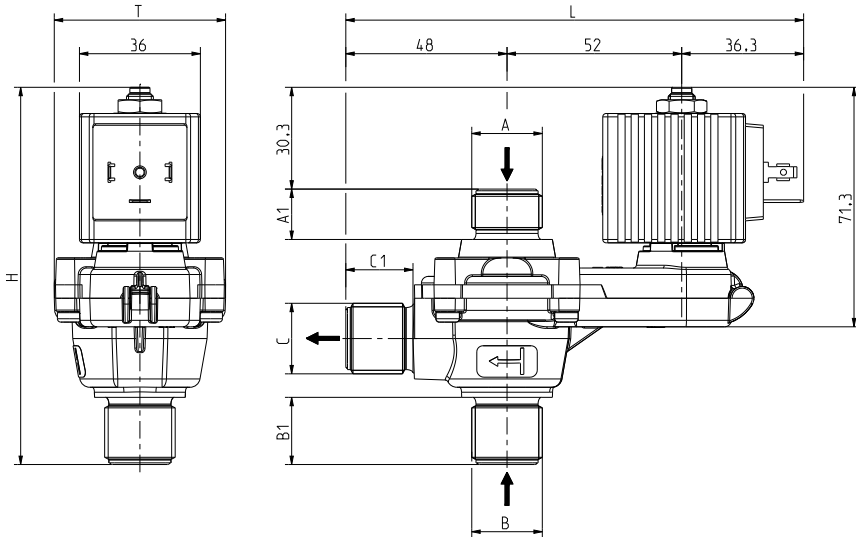


### Technical Data

<b>Type</b>	Lever solenoid valve	
<b>Construction</b>	3/2-way single chamber valve, direct acting, media separated	
<b>Function</b>	NO (normally open: R → A) NC (normally closed: P → A)	
<b>Fitting position</b>	Any, preferably with coil upwardly	
<b>Media</b>	Cold and heated water and physically and chemically similar media	
<b>T-Medium</b>	5 - 98	°C
<b>T-Ambient</b>	5 - 60	°C
<b>DN</b>	9	mm
<b>p-Operating</b>	0 - 0,6	bar
<b>Coil type</b>	MS 44	
<b>Nominal voltages</b>	see options other voltages on request	
<b>Voltage tolerance</b>	±10 % DC +10 / -5 % AC	
<b>Duty cycle</b>	100%	
<b>Protection Type</b>	IP 00 up to IP 65 according to EN 60529	
<b>Coil connections</b>	Plug socket according to EN 175301-803 (IP65)	
<b>Insulation class</b>	H	according to EN 60730-2-8
<b>Protection class</b>	I	according to EN 60730-2-8

### Materials

<b>Valve body</b>	PPE
<b>Plunger guide</b>	stainless steel
<b>Plunger and spring</b>	stainless steel
<b>Membrane and sealings</b>	FKM or EPDM
<b>Coil coating</b>	PA
<b>Filter (inlet)</b>	stainless steel (on request)

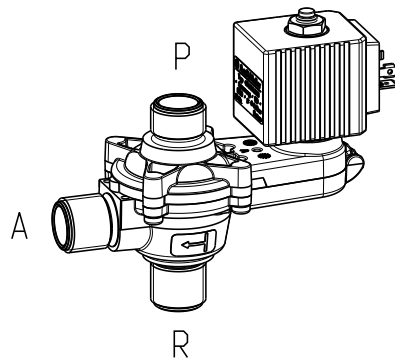

### Options

ID	Material	Inlet				Outlet		Length L	Height H	Depth T	Voltages
		Ø A	A1	Ø B	B1	Ø C	C1				
090902	PPE	G 1/2	15,0	G 1/2	20,0	G 1/2	20,0	136,3	112,3	51,0	24 V DC
090905											24 V AC 50 Hz
090912											110 V AC 50 Hz
090913											120 V AC 60 Hz
											230 V AC 50 Hz




ATTENTION

Danger due to high voltages 110, 120, 230 V AC.  
Disconnect the system from the power supply before carrying out maintenance or installation work. Connection work may only be carried out by qualified personnel.



## Series 47.009.303

Function: Distribution (ID: 090904)

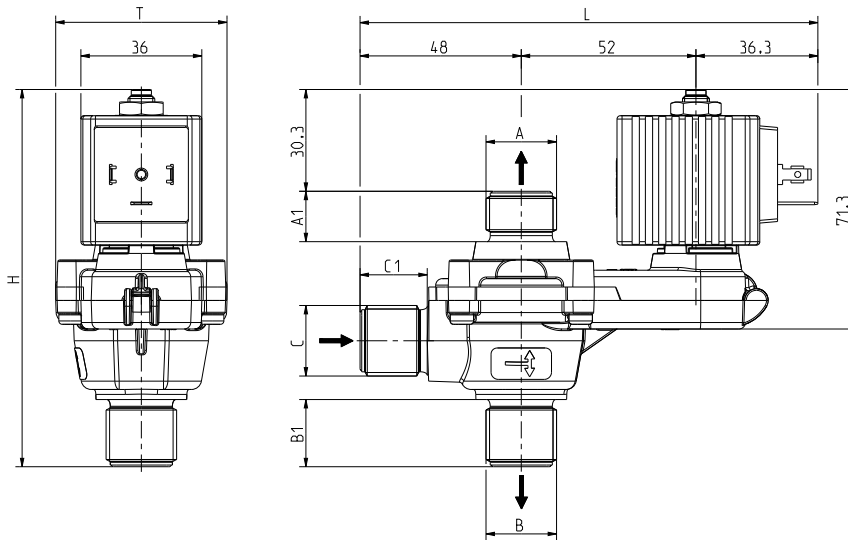


## Technical Data

<b>Type</b>	Lever solenoid valve
<b>Construction</b>	3/2-way single chamber valve, direct acting, media separated
<b>Function</b>	NO (normally open: R → A) NC (normally closed: P → A)
<b>Fitting position</b>	Any, preferably with coil upwardly
<b>Media</b>	Cold and heated water and physically and chemically similar media
<b>T-Medium</b>	5 - 98 °C
<b>T-Ambient</b>	5 - 60 °C
<b>DN</b>	9 mm
<b>p-Operating</b>	0 - 0,6 bar
<b>Coil type</b>	MS 44
<b>Nominal voltages</b>	see options other voltages on request
<b>Voltage tolerance</b>	±10 % DC +10 / -5 % AC
<b>Duty cycle</b>	100%
<b>Protection Type</b>	IP 00 up to IP 65 according to EN 60529
<b>Coil connections</b>	Plug socket according to EN 175301-803 (IP65)
<b>Insulation class</b>	H according to EN 60730-2-8
<b>Protection class</b>	I according to EN 60730-2-8

## Materials

<b>Valve body</b>	PPE
<b>Plunger guide</b>	stainless steel
<b>Plunger and spring</b>	stainless steel
<b>Membrane and sealings</b>	FKM or EPDM
<b>Coil coating</b>	PA
<b>Filter (inlet)</b>	stainless steel (on request)

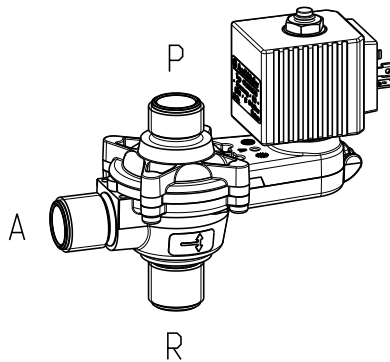

## Options

ID	Material	Outlet				Inlet		Length L	Height H	Depth T	Voltages
		Ø A	A1	Ø B	B1	Ø C	C1				
090904	PPE	G 1/2	15,0	G 1/2	20,0	G 1/2	20,0	136,3	112,3	51,0	24 V DC
090907											24 V AC 50 Hz
090910											110 V AC 50 Hz 120 V AC 60 Hz
090911											230 V AC 50 Hz



ATTENTION

Danger due to high voltages 110, 120, 230 V AC.  
Disconnect the system from the power supply before carrying out maintenance or installation work. Connection work may only be carried out by qualified personnel.



Solenoid valves  
Control valves  
Special valves and systems

A. u. K. Müller GmbH & Co. KG  
Dresdener Str. 162  
D-40595 Düsseldorf/Germany

Tel.: +49(0)211-7391-0  
Fax: +49(0)211-7391-281

e-mail: [info@akmueller.de](mailto:info@akmueller.de)  
Internet: [www.akmueller.de](http://www.akmueller.de)